

STAR™ Downhole Tubing/Casing (Aromatic Amine Epoxy - Product Data)

Product Description

- Pressure - Up to 2500 psi (17,2 MPa)
- Resin System - Aromatic Amine Cured Epoxy
- Reinforcement - Premium Fiberglass
- Joining Systems - API 5B, Threaded and Coupled or Integral Joint
- Joint Length - 28 to 33 feet (8,5 to 10,1 meters)
- Temperature - Up to 212° F (100° C) Maximum
- Sizes - 1.9 through 8 5/8 inches
- Fittings - A variety of filament wound API 5B threaded nipples and couplings

Product Design

- Non API Design
- Design Temperature - 212° F (100° C)
- Design - Based on the Proportional Elastic Limit in both the Hoop and Axial direction
- 100% Factory Hydro test - All sizes to 1.25 x Pressure Rating
- Tensile Test - The hydro test is across the joint and unrestrained; therefore, tensile loads of a proportional amount are generated

Flow Factors

- Hazen-Williams C=150
- Absolute Roughness = 0.00021 in. (0.00533 mm)

Nominal Moduli

- Modulus of Elasticity
 - Hoop - 3.5×10^6 psi (24,1 GPa)
 - Axial - 2.7×10^6 psi (18,6 GPa)
- Poisson's Ratio (Minor) = 0.35

Physical Properties

- Density = 128 lbs/cu ft (2050 kgs/cu m)
- Specific Gravity = 2.0

Thermal Properties

- Coefficient of Thermal Conductivity
 - 0.23 BTU/(ft•hr•°F) (0.4 W/(m•°C))
- Coefficient of Thermal Expansion
 - 8.8×10^{-6} in/in/°F ($15,8 \times 10^{-6}$ mm/mm/°C)

Benefits


- Corrosion Control
- Improved Flow Efficiency
- Easily Drilled Up
- Excellent Logging Characteristics

Applications


- Disposal or Injection Tubing
- Production Tubing - ESP, Gas Lift, Rod Pump, PCP
- Casing Liners
- Chemical Waste Disposal
- Geothermal
- Slotted Production Liners and Pre-packed Screens
- Observation Well Casing
- Open Hole Casing, Zone or to Surface

Joining System

Threaded and Coupled (T&C)

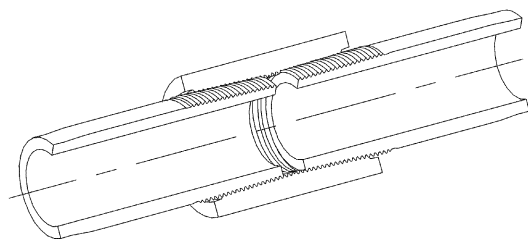

Integral Joint (IJ)

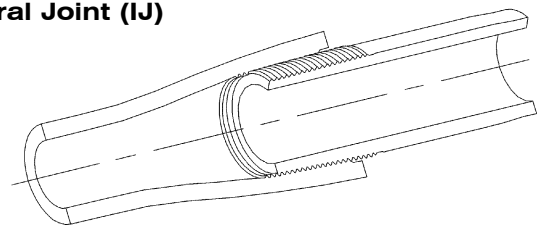

API 5B Threads (EUE 10rd, EUE 8rd, OD 8rd)

- Advanced Composite Thread (ACT)
- Precision molded with Epoxy, Graphite and Ceramic
- Tighter tolerances than steel
- Improved make and break properties
- Minimizes thread and wrench damage
- Provides higher thread shear than cut or ground threads
- Chemically resistant threads
- Compatible with steel API 5B threads

SIZE Thread	NOMINAL PIPE DIMENSIONS				IJ ⁽¹⁾ Connection Diameter in (mm)	T&C ⁽¹⁾ Connection Diameter in (mm)	TENSILE Rating ⁽²⁾ lbs (kgs)	COLLAPSE Rating ⁽²⁾ psi (MPa)	*Mfg. Loc
	Inside Diameter in (mm)	Drift Diameter in (mm)	Outside Diameter in (mm)	Pipe Weight lbs/ft (kg/m)					

Series 1250 (8,6 MPa) - ACT

2 3/8	2.00 (50,8)	1.91 (48,4)	2.33 (58,0)	1.05 (1,6)	3.20 (81,2)	3.25 (82,6)	8000 (3629)	1750 (12,1)	W,H,B
2 7/8	2.38 (60,5)	2.28 (57,9)	2.71 (68,8)	1.51 (2,2)	3.58 (90,9)	---	11000 (4990)	1750 (12,1)	W
2 7/8	2.43 (61,7)	2.34 (59,3)	2.77 (70,5)	1.52 (2,3)	---	3.80 (96,5)	11000 (4990)	1750 (12,1)	H
3 1/2	3.00 (76,2)	2.88 (73,0)	3.42 (87,0)	2.16 (3,2)	4.52 (114,8)	4.60 (116,8)	16000 (7258)	1400 (9,7)	W,H,O
4 1/2	3.75 (95,3)	3.63 (92,2)	4.28 (108,7)	3.33 (5,0)	5.51 (139,9)	---	24000 (10886)	1200 (8,3)	B,O
4 1/2	3.91 (99,3)	3.79 (96,1)	4.46 (113,4)	3.46 (5,2)	5.62 (142,7)	5.80 (147,3)	27000 (12247)	1200 (8,3)	W,H
5 1/2	4.74 (120,4)	4.62 (117,2)	5.41 (137,4)	5.01 (7,5)	6.49 (164,9)	6.45 (163,8)	39000 (17690)	1200 (8,3)	W,H
6 5/8	5.50 (139,7)	5.38 (136,5)	6.28 (159,5)	6.88 (10,2)	7.82 (198,5)	7.90 (200,7)	53000 (24041)	1200 (8,3)	W,H,O,B
8 5/8	7.50 (190,5)	7.38 (187,3)	8.56 (217,5)	12.53 (18,6)	9.99 (253,8)	10.0 (254,0)	101000 (45814)	1300 (9,0)	W,O,B

Series 1500 (10,3 MPa) - ACT

1 1/2	1.50 (38,1)	1.41 (35,7)	1.76 (44,7)	0.71 (1,1)	2.51 (63,7)	2.80 (71,1)	5000 (2268)	2000 (13,8)	W
2 3/8	2.00 (50,8)	1.91 (48,4)	2.35 (59,6)	1.27 (1,9)	3.20 (81,2)	3.25 (82,6)	9000 (4082)	2000 (13,8)	W,H,O,B
2 7/8	2.38 (60,5)	2.28 (57,9)	2.78 (70,6)	1.69 (2,5)	3.67 (93,3)	---	13000 (5897)	2000 (13,8)	W
2 7/8	2.43 (61,7)	2.34 (59,3)	2.85 (72,4)	1.69 (2,5)	---	3.80 (96,5)	13000 (5897)	2000 (13,8)	H
3 1/2	3.00 (76,2)	2.88 (73,0)	3.52 (89,4)	2.50 (3,7)	4.52 (114,8)	4.60 (116,8)	19000 (8618)	2000 (13,8)	W,H,O,B
4 1/2	3.75 (95,3)	3.63 (92,2)	4.40 (111,8)	4.02 (6,0)	5.69 (144,4)	---	30000 (13608)	2000 (13,8)	O,B
4 1/2	3.91 (99,3)	3.79 (96,1)	4.58 (116,5)	4.16 (6,2)	5.69 (144,6)	5.80 (147,3)	33000 (14969)	2000 (13,8)	W,H
5 1/2	4.74 (120,4)	4.62 (117,2)	5.60 (142,3)	6.51 (9,7)	6.64 (166,9)	6.60 (167,6)	53000 (24040)	2000 (13,8)	W,H
6 5/8	5.50 (139,7)	5.38 (136,5)	6.45 (163,8)	8.43 (12,5)	7.91 (200,9)	7.90 (200,7)	67000 (30391)	2000 (13,8)	W,H,O,B

Series 1750 (12,1 MPa) - ACT

1.90	1.50 (38,1)	1.41 (35,7)	1.81 (45,9)	0.81 (1,2)	2.71 (68,7)	2.80 (71,1)	6000 (2722)	2250 (15,5)	W,H
2 3/8	2.00 (50,8)	1.91 (48,4)	2.41 (61,9)	1.41 (2,1)	3.22 (81,7)	3.40 (86,4)	11000 (4990)	2250 (15,5)	W,H,O,B
2 7/8	2.38 (60,5)	2.28 (57,9)	2.86 (72,6)	1.96 (2,9)	3.80 (96,4)	---	15000 (6804)	2250 (15,5)	W
2 7/8	2.43 (61,7)	2.34 (59,3)	2.93 (74,4)	1.96 (2,9)	---	4.00 (101,6)	15000 (6804)	2250 (15,5)	H
3 1/2	3.00 (76,2)	2.88 (73,0)	3.61 (91,8)	3.05 (4,5)	4.63 (117,7)	4.80 (121,9)	24000 (10886)	2250 (15,5)	W,H,O,B
4 1/2	3.75 (95,3)	3.63 (92,2)	4.52 (114,8)	4.77 (7,0)	5.86 (148,8)	6.10 (154,9)	36000 (16329)	2250 (15,5)	W,H,B,O

SIZE Thread	NOMINAL PIPE DIMENSIONS				IJ ⁽¹⁾ Connection Diameter in (mm)	T&C ⁽¹⁾ Connection Diameter in (mm)	TENSILE Rating ⁽²⁾ lbs (kgs)	COLLAPSE Rating ⁽²⁾ psi (MPa)	*Mfg. Loc
	Inside Diameter in (mm)	Drift Diameter in (mm)	Outside Diameter in (mm)	Pipe Weight lbs/ft (kg/m)					

Series 2000 (13,8 MPa) - ACT									
1.90	1.50 (38,1)	1.41 (35,7)	1.86 (47,2)	0.99 (1,5)	2.71 (68,7)	2.80 (71,1)	7000 (3175)	2500 (17,2)	W,H
2 3/8	2.00 (50,8)	1.91 (48,4)	2.48 (62,9)	1.64 (2,4)	3.30 (83,7)	3.40 (86,4)	13000 (5897)	2500 (17,2)	W,H,O,B
2 7/8	2.38 (60,5)	2.28 (57,9)	2.94 (74,7)	2.38 (3,5)	3.92 (99,5)	--- ---	19000 (8618)	2500 (17,2)	W
2 7/8	2.43 (61,7)	2.34 (59,3)	3.01 (76,4)	2.39 (3,6)	--- ---	4.00 (101,6)	19000 (8618)	2500 (17,2)	H
4 1/2	3.75 (95,3)	3.63 (92,1)	4.64 (117,9)	5.46 (8,1)	6.01 (152,6)	6.10 (154,9)	43000 (19505)	2500 (17,2)	W,H,O,B

Series 2500 (17,2 MPa) - ACT									
1.90	1.50 (38,1)	1.41 (35,7)	1.96 (49,9)	1.28 (1,9)	2.85 (72,4)	2.90 (73,7)	10000 (4536)	3000 (20,7)	W,H
2 7/8	2.23 (56,6)	2.14 (53,3)	2.92 (74,2)	2.84 (4,2)	3.99 (101,4)	4.20 (106,7)	22000 (9979)	3000 (20,7)	H

***Manufacturing Location**
W = Wichita H = Harbin O = Oman B = Brazil

Joining System Information

API THREADED SIZE - Inches	1 1/2	2 3/8	2 7/8	3 1/2	4 1/2	6 5/8	8 5/8	
Thread Type⁽³⁾	EUE 10rd	EUE 8rd	EUE 8rd	EUE 8rd	EUE 8rd	OD 8rd	OD 8rd	
Thread Length - in (mm)	2.36 (59,9)	2.94 (74,7)	3.25 (82,6)	3.50 (88,9)	3.88 (98,6)	4.25 (108,0)	4.85 (123,2)	
Make-Up Length Loss - in/ft (mm/ft)	2.06 (52,4)	2.56 (65,1)	2.88 (73,0)	3.13 (79,4)	3.50 (88,9)	3.88 (98,4)	4.50 (114,3)	
Make-Up Torque - ft. • lbs. (N • m)	• Optimum	125 (170)	150 (204)	185 (252)	225 (306)	300 (408)	500 (680)	
	• Minimum	100 (136)	125 (170)	150 (204)	175 (238)	250 (340)	400 (544)	
	• Maximum	175 (238)	225 (306)	250 (340)	300 (408)	450 (612)	650 (884)	
Recommended Make-Up Tool	No. 5 Strap				No. 11 Strap	Approved Power Tongs		
Pin Upset O.D. - in (mm)	2.15 (54,6)	2.60 (66,0)	3.10 (78,7)	3.75 (95,3)	4.75 (120,7)	6.65 (168,9)	7.05 (179,1)	
Handling Tools								
Elevators T&C (Shoulder Type) - in. ⁽⁴⁾	2 3/8	2 7/8	3 1/2	4 1/2	5 1/2	7	7 5/8	
Elevators IJ (Slip Type) ⁽⁵⁾	MYT	MYT	MYT	YT	YC	MYT	YT	
Floor Slips (Standard Type) - in. ⁽⁶⁾	1 1/2	2 3/8	2 7/8	3 1/2	4 1/2	6 5/8	7	
Thread Compatibility								
FRP Long vs. Steel Short Form ⁽³⁾ (Extra Threads, Front of FRP Pin)	6	5	6	6	7	6	7	
Lubricant Usage (Joints/Gallon)	100	100	100	68	50	34	26	
Stretch Factor (in/per 100 ft) (mm/per 30.5 m)	Series 1250	---	4.01 (101,9)	2.75 (69,9)	1.98 (50,3)	1.20 (30,4)	0.61 (15,4)	0.66 (16,8)
	1500	---	3.24 (82,4)	2.47 (62,6)	1.55 (39,3)	0.98 (25,0)	0.48 (12,3)	0.34 (8,6)
	1750	5.24 (133,1)	2.91 (73,8)	2.11 (53,5)	1.36 (34,6)	0.87 (22,0)	---	---
	2000	4.22 (107,1)	2.48 (62,9)	1.69 (43,0)	1.42 (36,1)	0.75 (19,0)	---	---
	2500	3.20 (81,2)	2.04 (51,8)	1.46 (37,2)	1.02 (25,8)	0.69 (17,5)	---	---
Tensile Ultimates⁽⁷⁾ psi (MPa)	20,000 (137,8)	35,000 (241,3)	45,000 (310,2)	60,000 (413,6)	90,000 (620,5)	140,000 (965,2)	175,000 (1206,5)	
Setting Tension - Refer to NOV Fiber Glass Systems Downhole Tubing Installation and Application Practices - Considerations for Setting Tubing Tension (Anhydride & Aromatic Amine Tubing)								

Corresponding Numbered Notes:

- Collars** - Smaller O.D. collars are available upon request, subject to application approval. Any order for integral joint products may include up to 15% threaded and coupled pipe.
- Ratings** - All ratings are maximum operating limits. Exceeding these limits will void the warranty on all STAR pipe.
- Threads** - All 1 1/2" EUE 10rd and 2 3/8" - 4 1/2" EUE 8rd API threads conform to API 5B Table 14, 14th Edition (L4 is minimum) and all 5 1/2" - 9 5/8" O.D. 8rd casing threads conform to API 5B, Table 7, 14th Edition (L4 is minimum).
- Elevators T&C** - The 1250 & 1500 psi products have smaller OD's which may work with the same size elevators as the thread size.
- Elevators IJ** - The setting plate must be removed so that the slips will properly set on the fiberglass pipe. Sizing slip type elevators requires use of the tubing O.D. instead of the upset O.D. on the male end. Rubber setting plates are available to minimize marking and to improve the fit. Shorter bolts are required to hold in place.
- Floor Slips** - When running lighter weight (1250-1500 PSI) products, it is good practice to replace the slip dies to make sure they will latch on the pipe body.
- Ultimates** - The typical mode of failure for pressure is weep and for tensile it is an across the joint pipe body shear.

Pipe Capacity			
Size	Inside Diameter		Capacity
Thread	in	(mm)	bbls/1,000 ft (m ³ /km)
1.90	1.50	(38,1)	2.20 (1,1)
2 3/8	2.00	(50,8)	3.90 (2,0)
2 7/8	2.38	(60,5)	5.50 (2,9)
2 7/8	2.43	(61,7)	5.70 (3,0)
3 1/2	3.00	(76,2)	8.70 (4,5)
4 1/2	3.75	(95,3)	13.70 (7,1)
4 1/2	3.91	(99,3)	14.90 (7,8)
6 5/8	5.50	(139,7)	29.40 (15,3)
8 5/8	7.50	(190,5)	54.70 (15,3)

Packer Selection

(More information listed in “Downhole Tubing and Casing Installation and Application Practices” Manual)

- STAR tubing is designed to be set in tension (see stretch chart).
- Double Grip Packers are preferred with an on/off tool seal assembly, one-fourth turn release.
- Direct Tension Set Packers should be avoided due to the movement of fiberglass.
- Direct Set Packers are set <3500 feet deep (1,067 m).
- When packer setting is >3500 feet (1,067 m) deep, use steel work string to set packer.
- Hydraulic Set Packers are not recommended due to uncontrollable forces.
- Polished Bore Receptacles are set with proper precautions to avoid compression. A complete STAR Well Evaluation must be performed to determine the proper set-ups.

Perforation

- Use a Jet Perforating Gun. Shoot a maximum of two shots at a time at 0° Phase or 180° Phase.
- Thread lock all steel to FRP connections.
- When installing mixed strings, have one joint of FRP casing supplied without a coupling (pin x pin) for cross-overs.

Cementing

- Cementing in two stages may help avoid exceeding collapse rating.
- Keep differential below external and internal ratings at all times.
- Care must be given to avoid shock collapse pressure when setting cement plug.
- Fiberglass centralizers are available, metal centralizers must be qualified to fit to FRP.
- Cement residue can be cleaned up with proper care using a rock bit.
- Landing joints are available, but must be sized for the well-head selected.
- Drilling-Up fiberglass tubing or casing is easy with a rock bit (not a mill).

Rod Pump Wells

- Rod Guides must be used.

Electric Submersible Pumps

- Care must be given to direction and amount of start-up torque.

Fishing

- Normal Procedures, Spear or Overshot.

Cutting

- Mechanical Jet Cutter.

National Oilwell Varco has produced this brochure for general information only, and it is not intended for design purposes. Although every effort has been made to maintain the accuracy and reliability of its contents, National Oilwell Varco in no way assumes responsibility for liability for any loss, damage or injury resulting from the use of information and data herein nor is any warranty expressed or implied. Always cross-reference the bulletin date with the most current version listed at the web site noted in this literature.



North America

17115 San Pedro Ave. Suite 200
San Antonio, Texas 78232 USA
Phone: 210 477 7500

South America

Estrada de Acesso á Zona
Industrial Portuária de Suape, s/no.
Recife, PE, Brazil 55.590-000
Phone: 55 81 3501 0023

Europe

P.O. Box 6, 4190 CA
Geldermalsen, The Netherlands
Phone: 31 345 587 587

Asia Pacific

No. 7A, Tuas Avenue 3
Jurong, Singapore 639407
Phone: 65 6861 6118

Middle East

P.O. Box 17324
Dubai, UAE
Phone: 971 4881 3566